

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
16 October 2003 (16.10.2003)


PCT

(10) International Publication Number  
**WO 03/085821 A1**

- (51) International Patent Classification<sup>7</sup>: **H03F 1/32, 3/45** (74) Agent: **DEGUELLE, Wilhelmus, H., G.**; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: **PCT/IB03/01191**
- (22) International Filing Date: **20 March 2003 (20.03.2003)** (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data: **02076400.7** **8 April 2002 (08.04.2002)** **EP** (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): **KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]**; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **DEKKERS, Jan, C., A. [NL/NL]**; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **LEENAERTS, Dominicus, M., W. [NL/NL]**; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- Published:  
— with international search report

[Continued on next page]

(54) Title: A DIFFERENTIAL AMPLIFIER

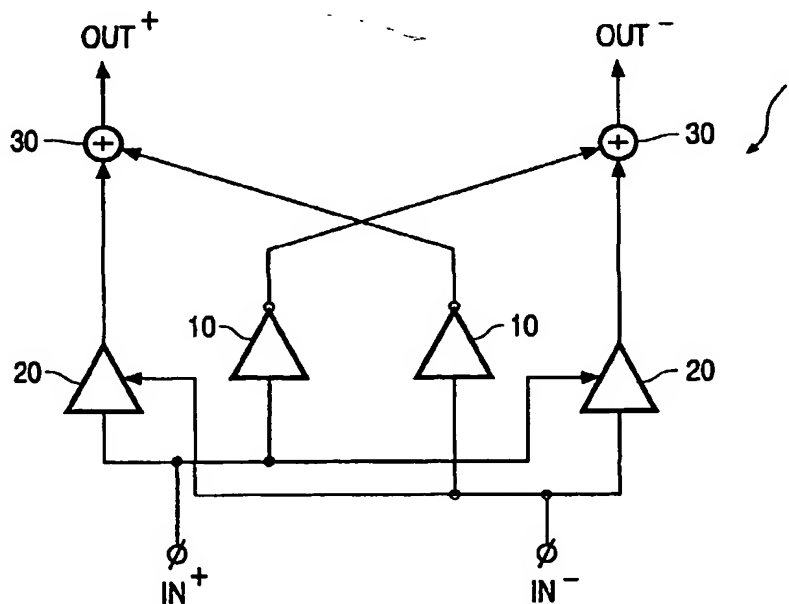

(57) Abstract: A differential amplifier for amplifying an input differential signal having two components (In+, In-) substantially in anti-phase to each other and generating an output differential signal having two differential components (Out+, Out-). The amplifier comprises a pair of inverters coupled to a pair of adders receiving the input differential signal. The amplifier is characterized in that it further comprises a pair of controllable buffers for receiving the input differential signal and outputting a signal to the pair of adders. A bias of the said pair of buffers is cross-controlled by the input differential signal for controlling an amplification of said pair of controllable buffers.